

Von Arx EOOD 20, Nedyalka Shileva str. Trakiya – Industrial zone 4000 Plovdiv, Bulgaria e-mail: info@vonarx.com VAT Number: BG202437214



DTF 25 Drum mounting instruction

1. Unscrew and remove the 4 conical nuts on the side cover.




Figure 1

2. Remove the side cover by tightening the 2 butterfly screws (108029) that come with the machine.



Figure 2



Von Arx EOOD 20, Nedyalka Shileva str. Trakiya – Industrial zone 4000 Plovdiv, Bulgaria e-mail: info@vonarx.com VAT Number: BG202437214



3. Rotate the shaft so that the two pins are in a horizontal position (to position the drum more easily)

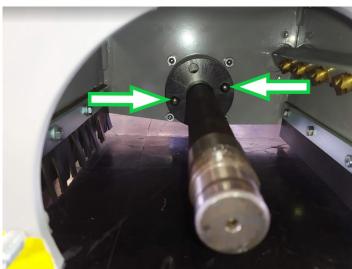


Figure 3

4. Slide the drum on the shaft so that the two pins on the machine flange are against the two holes on the drum.






Figure 4



Von Arx EOOD 20, Nedyalka Shileva str. Trakiya – Industrial zone 4000 Plovdiv, Bulgaria e-mail: info@vonarx.com VAT Number: BG202437214



5. Check that the drum is properly engaged with the shaft




Figure 5

6. Tighten the shaft nut using the two wrenches included in the machine kit.

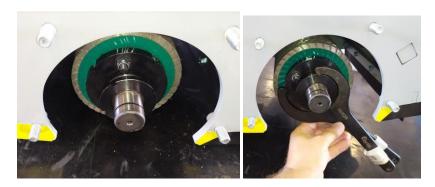


Figure 6

7. Install the side cover with the 4 conical nuts with the cone of the nuts facing the cover.



Figure 7